


SAVÁLLÓ KARIMÁS GOLYÓSCSAP

3 részes, standard B304D

3-PC Flanged Ball Valve

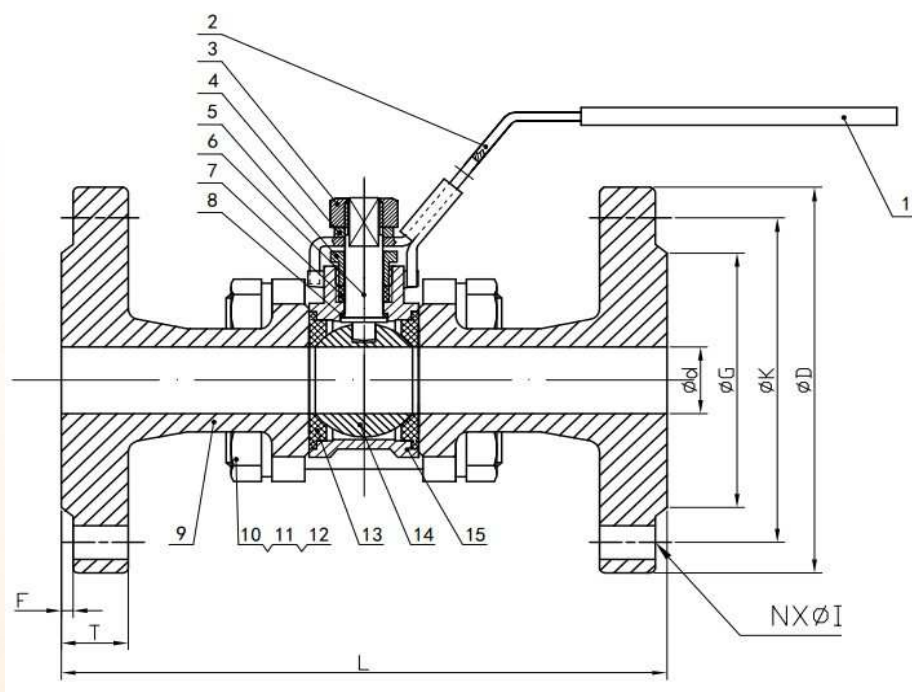

DN	d	L	G	K	D	T	F	N-I
15	15	130	45	65	95	16	2	4-14
20	20	150	58	75	105	18	2	4-14
25	25	160	68	85	115	18	2	4-14
32	32	180	78	100	140	18	2	4-18
40	38	200	88	110	150	18	3	4-18
50	50	230	102	125	165	20	3	4-18
65	65	290	122	145	185	22	3	8-18
80	76	310	138	160	200	24	3	8-18
100	94	350	162	190	235	24	3	8-22

MATERIAL LIST

ITEM	DESCRIPTION	MATERIAL
1	PLASTIC COVER	PLASTIC
2	HANDLE	304
3	NUT	304
4	THRUST WASHER	304
5	GLAND	304
6	STEM	304/316
7	STEM PACKINGS	PTFE
8	STEM SEAL	PTFE
9	CAP	CF8/CF8M/WCB
10	BOLTS	304
11	BOLT NUTS	304
12	BOLT WASHERS	304
13	BOLT SEAT	RPTFE
12	BALL	304/316
13	BODY	CF8/CF8M/WCB

FEATURES

Handle with lock can be choiced.

Working pressure:PN40

Pressure test: API 598

Working temperature:-10°C to 150°C

Suitable medium:W.O.G.

PED97/23/EC(CE0038)Approved

Inspection Testing:API598,EN12266

Flange End: DIN2635-PN40

Face to Face:DIN3202-F1

Full bore