


Saválló menetes T-idom NK 1007

Tee

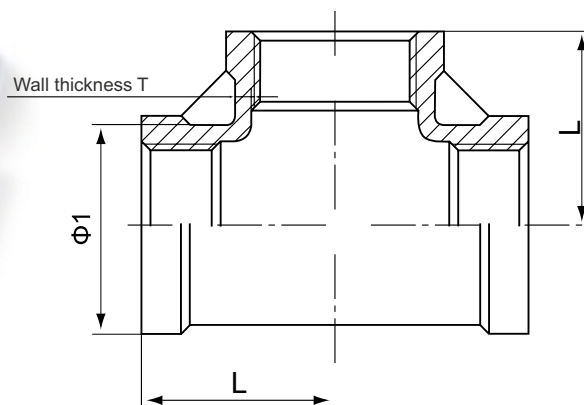

| | | | | | | | | | | | | | |
|------------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|-------|
| Standard | SIZE | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2 1/2 | 3 | 4 |
| ISO4144 * | Φ1 | 13 | 16.5 | 20 | 24.5 | 30 | 37.5 | 46.5 | 53 | 65.5 | 82 | 95.5 | 121.5 |
| | L | 17 | 19 | 23 | 27 | 32 | 38 | 45 | 48 | 57 | 69 | 78 | 96 |
| | T | 2.5 | 2.5 | 2.8 | 1.65 | 1.75 | 2 | 2.25 | 2.5 | 2.85 | 3.25 | 3.75 | 4.25 |
| Standard | SIZE | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2 1/2 | 3 | 4 |
| EN-10241 * | Φ1 | 17 | 21.3 | 23.5 | 30 | 35 | 43 | 52 | 58 | 71 | 86.6 | 100.2 | 125 |
| | L | 19 | 21 | 23.6 | 28 | 33 | 38 | 45 | 50 | 58 | 70 | 78.5 | 97 |
| | T | 3.6 | 4.35 | 4.85 | 3.4 | 4.15 | 5.05 | 5.5 | 5 | 5.6 | 5.75 | 6 | 6.5 |
| Standard | SIZE | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2 1/2 | 3 | 4 |
| JIS | Φ1 | 16 | 19 | 22 | 26 | 32 | 39 | 48 | 55 | 67 | 83.5 | 97 | 123 |
| | L | 17 | 19 | 23 | 27 | 32 | 38 | 46 | 48 | 57 | 69 | 78 | 96 |
| | T | 2.5 | 2.5 | 2.5 | 2.5 | 3 | 3 | 3.5 | 3.5 | 4 | 4.5 | 5 | 5.5 |
| Standard | SIZE | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2 1/2 | 3 | 4 |
| SP-114 | Φ1 | 13.5 | 15.4 | 19.7 | 26.2 | 31.9 | 39.8 | 47.8 | 55.9 | 66.5 | 83.3 | 98.2 | 123 |
| | L | 20.6 | 20.6 | 23.6 | 28.5 | 33.3 | 38.1 | 44.5 | 49 | 57.1 | 68 | 77.6 | 96.8 |
| | T | 2.7 | 2.7 | 2.7 | 2.7 | 3.2 | 3.2 | 3.8 | 3.8 | 4 | 4.7 | 5.2 | 6 |

* Raktáron

FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ECT